

**IMPORTANT SAFEGUARDS**

**Cautions:**


1. Do not use an electric generator to test the LED fixture.
2. Please abide by the laws and regulations of the related country, region, and locality when installing this fixture.
3. Do not install the fixture on rainy days to avoid electrical shock or damage.

**Notes:**


1. To avoid the possibility of electrical shock or fire, the installation personnel must have professional knowledge of electrical work.
2. Please wear gloves to avoid any injury before installation.
3. Should you notice at some point during or after the installation that smoke or fire is coming from the fixture, turn the power off immediately and notify an electrician.
4. This fixture is available for outdoor use. The recommended minimum distance from the fixture to ground is 2 meters.




**Installation:**




1. Turn the power off.




2. Use a screwdriver to remove the screws on both sides.

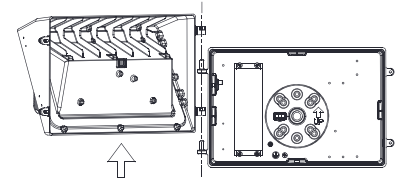


3. Open the fixture, disconnect the connection terminals, and remove the upper cover from the fixture.




4. Drill through the mounting hole with an electric drill.




5. Attach EVA cotton pad to the bottom Shell.




6.1.1 Use a screwdriver to remove the plug.




6.1.2 Lock the bottom shell on the mounting seat with screws.




6.1.3 L, N, and G wires are connected to the power supply.




6.2.1 Use a screwdriver to remove the plug.




6.2.2 Lock the bottom shell on the mounting seat with screws.




6.2.3 L, N, and G wires are connected to the power supply.

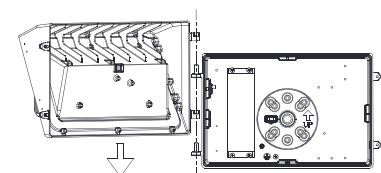

7. Install the cover of the fixture and connect the terminals.



8. Install the cover of the fixture and connect the terminals.



9. Make sure that the installation is complete before turning the power back on.

### Standard Wire:


L/Live Wire: Black/Brown, N/Null Wire: Whitellalue, Ground Wire: Green\Yellow-green.

Warning: During grounding, make sure the earth wire of the driver and fixture housing are connected together with the earth wire of the local power supply.

### Special Function Instructions:

1. The color temperature of the lamp turns to 3000 K when the DIP switch is set to 3 K.
2. The color temperature of the lamp turns to 4000 K when the DIP switch is set to 4 K.
3. The color temperature of the lamp turns to 5000 K when the DIP switch is set to 5 K.


Note: Please turn off the power before adjusting the color temperature.



### Wattage Adjustable Instructions:

The power of the lamp will change to the corresponding wattage when the DIP switch is set to L/M/H.  
 Adjustable wattage range: 25%-100%.

Note: Please turn off the power before adjusting the wattage.



### Photocell:

1. Connection of the male and female connector will help turn on the photocell. (Figure 1)
2. Disconnection of the male and female connector will help turn off the photocell. (Figure 2)




Figure 1



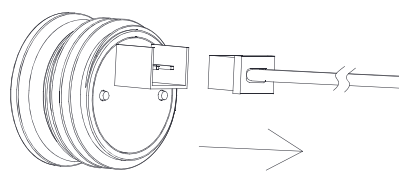


Figure 2

### Instructions for Shield:



1. Install the shield on the fixture and align it with holes.




2. Fix the screws on all sides to secure the shield.

### Instructions for Sensor:




1. Use a screwdriver to remove the 1/2 plug.




2. Twist-lock the sensor to the 1/2 plug to make it work properly.


**Instructions for Surge Protective:  
 Wiring Diagram**

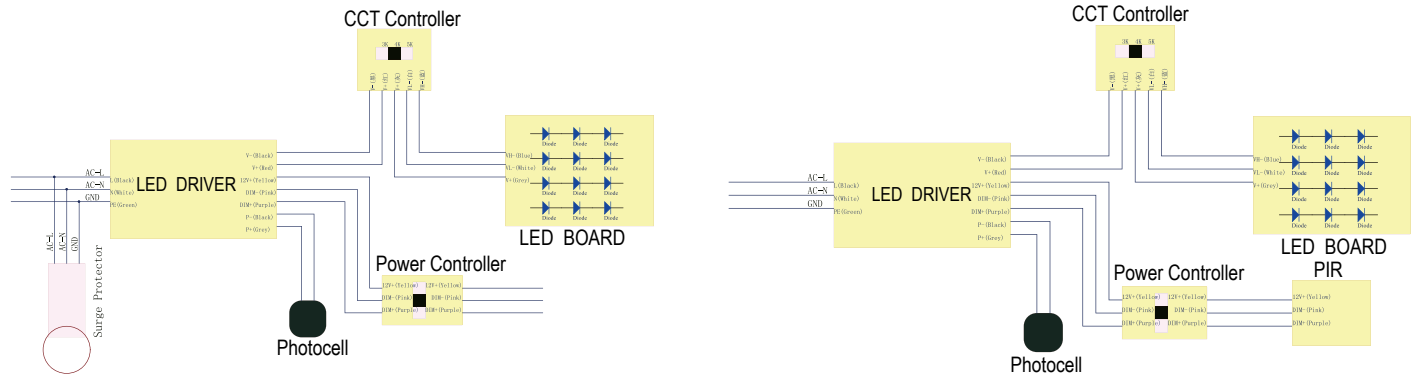


**Instructions for Backup Driver:**




1. Open the fixture with a screwdriver.




2. Remove the 1/2 hole plug.



3. Secure the backup driver to the base seat, lock the screw, and secure the button to the 1/2 hole.

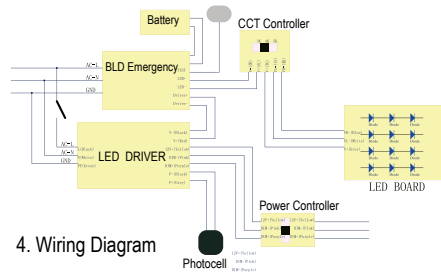

4. Wiring Diagram




5. Fix the fixture with screw.

**Instructions for Wire Guard:**



1. Install the wire guard on the fixture and align it with holes.



2. Remove the 1/2 hole plug.