

ITEM SKU#: 662187486062

Edin Wall Pack (Semi Cutoff)

INDUSTRIAL LIGHTING | WALL PACKS



FEATURES

- Comes with CCT and power selectable capability.
- Excellent efficacy supported by high light output and CRI, resulting in bright, clear, and uniform illumination.
- Rugged die-cast aluminum housing makes it ideal for outdoor use.
- Offers wide light distribution and greater energy savings compared to traditional fixtures.
- Surge-protected and suitable for wet locations (IP65 rated).
- Dimming capable (0-10 V) for enhanced lighting experience.

APPLICATIONS

Building Facades, Entrances, Courtyards, Commercial Spaces, Industrial Areas, Retail and Hospitality Buildings, Landscape Lighting

PRODUCT DETAILS

ELECTRICAL

| | |
|---------------------------------|------------------------|
| Max Power | 123.5 W |
| Voltage | 120-277 V |
| Current | 0.50 A |
| Power Factor | 0.9 |
| Total Harmonic Distortion (THD) | 15% |
| Surge Protection | L-N: 6 kV, L&N-E: 6 kV |

LIGHTING PERFORMANCE

| | |
|--|--|
| Lumens | 9711.8 lm-11792.9 lm-13874 lm-17138 lm |
| Efficacy | 138.74 lm/W |
| Color Temperature (Selectable) | 3000 K-4000 K-5000 K |
| Color Rendering (CRI) | 82 |
| R9 (Red Value) | 3 |
| R13 (Skin Tones) | 82-85-83 |
| Beam Angle | 105° |
| Light Distribution | Type II, Very Short |
| BUG Rating (Backlight, Uplight, and Glare) | B2-U2-G2 |
| Dimmable Lighting Control | Continuous Dimming to 10% or Below |

ENVIRONMENT

| | |
|--------------------------------|------------------|
| Operating Temperature | -40 °F ~ +122 °F |
| Suitable Location | WET |
| Ingress Protection Rating (IP) | IP65 |
| Impact Protection Rating (IK) | IK05 |

LIFESPAN

| | |
|----------------------|----------|
| Average Life (Hours) | 50,000 |
| Warranty (Years) | 5 |

COMPONENTS

| | |
|------------------|-------------------|
| LED Light Source | Lumileds SMD 2835 |
| Driver | FAHOLD |

CONSTRUCTION

| | |
|----------------|-------------------|
| Housing | Die-cast Aluminum |
| Cover Material | Glass |
| Diffuser | Frosted |
| Power Supply | Hard Wired |
| Finish | Bronze |

PART NUMBER & QUALIFICATIONS


| | |
|-----------------------|---|
| Ordering Part Number | IK-SWPM-120WBSGDA1-BRW30/40/50 |
| Qualified Part Number | IK-SWPM-120WBSGDA1-[BR, WH, BL, C or Blank] [“M”, “R” or blank][“S” or blank]W30/40/50 |
| SKU Number | 662187486062 |



Not all product variations listed on this page are DLC qualified. Visit <https://www.designlights.org/qpl> to confirm qualification.

DIMENSIONS AND WEIGHT

| | |
|------------------|-------|
| Length (Inches) | 14.2" |
| Width (Inches) | 8.6" |
| Height (Inches) | 6.5" |
| Net Weight (lbs) | 7.5 |

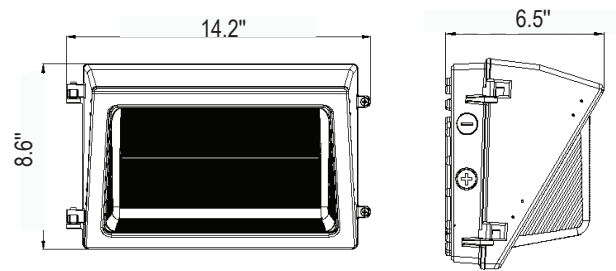

PACKAGING

| | |
|-------------------------|----------------------|
| Box Dimensions (Inches) | 16.1" x 11.4" x 9.4" |
| Box Weight (lbs) | 1.37 |
| Quantity Per Box | 1 |

SUPPORTING DOCUMENTS

| DOCUMENTS | DOCUMENT LINK |
|---|---------------------------------|
| Product Sheet | View / Download |
| IES Files | View / Download |
| LM79 Report | View / Download |
| LM80 Report | View / Download |
| Installation Instructions | View / Download |

ORDERING INFORMATION

| SKU NUMBER | DESCRIPTION | QUANTITY/BOX |
|--------------|---|--------------|
| 662187486062 | EDIN WP (SC): 123.5 W / 9711.8-11792.9-13874-17138 LM / 30-40-50 K / 120-277 V / BRONZE | 1 |

ACCESSORIES

SOLD SEPARATELY

| SKU NUMBER | PRODUCT CODE | DESCRIPTION | DOCUMENT LINK |
|--------------|----------------------------|-------------------------|---------------------------------|
| 662187486567 | IK-HB01DMS-C | MICROWAVE MOTION SENSOR | View / Download |
| 662187486574 | IK-HB02DPR-C | PIR SENSOR | View / Download |
| 662187486581 | IK-ACC-SWPM-SHIELD | SHIELD | View / Download |
| 662187486666 | IK-ACC-SWPM-WG | WIRE GUARD | View / Download |
| 662187486543 | IK-ACC-SPD-10KV (100-277V) | SURGE PROTECTION DEVICE | View / Download |