

ITEM SKU#: 662187482248

Maxton Yard Light

INDUSTRIAL LIGHTING | YARD LIGHTS

FEATURES

- CCT & power selectable capability.
- Soft & even light output with high color rendering.
- Suitable for wet locations (IP65 rated).
- Dimming capable.
- Instant start with no flickering or humming.

APPLICATIONS

Lawns, Gardens & Backyards, Driveways, Loading Docks, Farmyards, General Area Lighting & Landscape Lighting

MOUNTING OPTIONS

- Pole Mounting
- Wall Mounting

PRODUCT DETAILS

ELECTRICAL

Max Power	58.74 W
Voltage	120-277 V
Current	0.24 A
Power Factor	0.9
Total Harmonic Distortion (THD)	15%
Surge Protection	2 kV

LIGHTING PERFORMANCE

Lumens	4270.5 lm-5694 lm-7117.5 lm-8361.4 lm
Efficacy	142.35 lm/W
Color Temperature (Selectable)	3000 K-4000 K-5000 K
Color Rendering (CRI)	80
R9 (Red Value)	6
R13 (Skin Tones)	83-85-81
Beam Angle	140°
Light Distribution	Type V
BUG Rating (Backlight, Uplight, and Glare)	B3-U3-G1
Dimmable Lighting Control	Continuous Dimming to 10% or Below

*Lumen output may vary by $\pm 10\%$ depending on the chosen power and CCT combination.
*R13 value is calculated at 60 W.



ENVIRONMENT

Operating Temperature	-40 °F ~ +122 °F
Suitable Location	WET
Ingress Protection Rating (IP)	IP65
Impact Protection Rating (IK)	IK08

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	7 (Extendable up to 10 years)

COMPONENTS

LED Light Source	Lumileds 2835
Driver	HBE, HB-HLA60-46

CONSTRUCTION

Housing	Die-cast Aluminum
Cover Material / Lens	Polycarbonate
Diffuser	Clear
Base / Power Supply	Hard Wired
Finish	Bronze
Effective Projected Area (EPA)	0.42 ft²
Wind Shear Rating	20 mph

PART NUMBER & QUALIFICATIONS

Ordering Part Number	IK-YLDD-60W-30/40/50K-BR
Qualified Part Number	IK-YLDD-60W-30/40/50K-[BR, WH, BL, GR, SL][AM, YM or blank][10SP, 20SP or blank][3RP, 3NP, 5RP, 5NP, 7RP, 7NP or blank]
SKU Number	662187482248




Not all product variations listed on this page are DLC qualified. Visit <https://www.designlights.org/qpl> to confirm qualification.

DIMENSIONS AND WEIGHT

Length (Inches)	13.52"
Width (Inches)	9.84"
Height (Inches)	6.96"
Net Weight (lbs)	5.51

PACKAGING

Box Dimensions (Inches)	16.53" x 12.99" x 13.97"
Box Weight (lbs)	15.21
Quantity Per Box	2

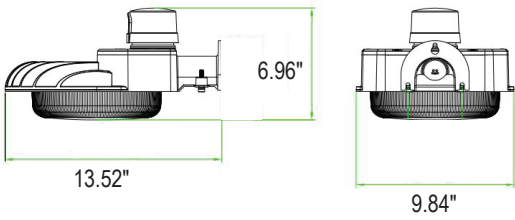

SUPPORTING DOCUMENTS

DOCUMENTS	DOCUMENT LINK
Product Sheet	View / Download
IES Files	View / Download
LM79 Report	View / Download
LM80 Report	View / Download
Installation Instructions	View / Download

ORDERING INFORMATION

SKU NUMBER	DESCRIPTION	QUANTITY/BOX
662187482248	MAXTON YL: 58.74 W / 4270.5-5694-7117.5-8361.4 LM / 30-40-50 K / 120-277 V / BRONZE	2

ACCESSORIES

SOLD SEPARATELY

SKU NUMBER	PRODUCT CODE	DESCRIPTION	DOCUMENT LINK
662187482217	IK-SHC-JL-208	SHORTING CAP	View / Download
662187482231	IK-PHC-3PIN-AC100-277V	PHOTOCELL (3 PIN) AC100-277 V	View / Download

NOTE: Other Options on Request/Customized: **Finish** (WH-White, BL-Black, GR-Gray, SL-Silver), **Accessories** (AM-Pipe Arm Mount, YM-Yoke Mount, 10SP-Surge Protection, 20SP-Surge Protection, 3RP-3 Photocell, 3NP-3 No Photocell, 5RP-5 Photocell, 5NP-5 No Photocell, 7RP-7 Photocell, 7NP-7 No Photocell)