

ITEM SKU#: 662187536842 **Contrila** CCT & Power Selectable Edge-Lit Panel Light 1'×4' **COMMERCIAL LIGHTING | PANEL LIGHTS**

FEATURES

- Edge-lit low-profile design.
- CCT and wattage selectable for enhanced light control.
- High-quality LGP for evenly distributed light.
- Supports dimming.

APPLICATIONS

Ideal for retrofitting inefficient light fixtures in malls, hospitals, airports, offices, lobbies and other commercial applications.

MOUNTING OPTIONS

Surface Mount Kit Suspended Mount Klt

PRODUCT DETAILS

ELECTRICAL

Power (Selectable)	20 W-25 W-30 W-35 W
Voltage	100-277 V
Current	0.39 A
Power Factor	≥0.90
Total Harmonic Distortion (THD)	15%

LIGHTING PERFORMANCE

Lumens	2500 lm-3125 lm-3750 lm-4375 lm
Luillelis	2500 111-5125 111-5750 111-4575 111
Efficacy	125 lm/W
Color Temperature (CCT)	3000 K-3500 K-4000 K-5000 K
Color Rendering (CRI)	80+
R9 (Red Value)	3-10-3
R13 (Skin Tones)	
Beam Angle	120°
Light Distribution	Type VS
BUG Rating (Backlight, Uplight, and Glare)	B2 - U2 - G1
Dimmable Lighting Control	0-10 V, Range 10% - 100%

ENVIRONMENT

Operating Temperature	-4 °F ~ +113 °F	
Suitable Location	DAMP	
Ingress Protection Rating (IP)	IP40	

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	5 (10 Years Warranty Option Available)

COMPONENTS

LED Light Source	Epistar
Driver	Lifud

CONSTRUCTION

Housing	Aluminum and High Quality LGP
Diffuser	
Base / Power Supply	Hard Wired
Finish	White

PART NUMBER & QUALIFICATIONS

IK-FP14-0035-DY-XX-J
Not Qualified Yet
662187536842





Page | 1

The product images shown are for illustration purposes only and may not be an exact representation of the product. Specifications subject to change without notice.

© 2021 IKIO LED LIGHTING. All Rights Reserved. Products and technologies in this document may be covered by one or more Patents Pending.


info@ikioledlighting.com | +1 844-533-4546 | www.ikioledlighting.com

© 2021 IKIO LED LIGHTING. All Rights Reserved. Products and technologies in this document may be covered by one or more Patents Pending. The product images shown are for illustration purposes only and may not be an exact representation of the product. Specifications subject to change without notice.

Technical Data Sheet

DIMENSIONS AND WEIGHT

Lenght	47.7"
Height	0.39"
Width	12"
Net Weight (lbs)	
Chain Length	
Wire Length	
PACKAGING	
Box Dimensions (Inches)	
Box Weight (Ibs)	
Quantity Per Box	1

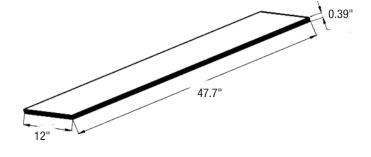

SUPPORTING DOCUMENTS

Product Sheet	View / Download
Installation Instructions	On Request
IES Files	On Request
LM79 Files	On Request
LM80 Files	On Request

ORDERING INFORMATION

ITEM	DESCRIPTION	CASE
662187536842	CONTRILA 1' x 4': 20 W-25 W-30 W-35 W / 3000 K-3500 K-4000 K-5000 K / 100-277 V / DIMMABLE / WHITE	1

ACCESSORIES

662187558875	EMERGENCY PACK FOR LED FIXTURE 10 W/90 MIN/SPLIT TYPE/L AC	1
662187528601	EMERGENCY PACK FOR LED FIXTURE 18 W/90 MIN/SPLIT TYPE/L DC	1
662187548487	SMART OCCUPANCY SENSOR ON/OFF ONLY	1
662187548043	SMART OCCUPANCY SENSOR WITH DAYLIGHT HARVESTING	1
662187477046	REMOTE CONTROL	1

MOUNTING OPTIONS

662187477640	SURFACE MOUNT KIT	1
662187476605	SUSPENDED MOUNT KIT	1







ITEM SKU#: 662187536842 Contrila CCT & Power Selectable Light 1' x 4'