

ITEM SKU#: 662187475516

Contrila CCT & Power Selectable Edge-Lit

Panel Light 1'x4'

COMMERCIAL LIGHTING | PANEL LIGHTS

FEATURES

- Edge-lit low-profile design.
- · CCT and wattage selectable for enhanced light control.
- High-quality LGP for evenly distributed light.
- · Supports dimming.

APPLICATIONS

Ideal for retrofitting inefficient light fixtures in malls, hospitals, airports, offices, lobbies and other commercial applications.

MOUNTING OPTIONS

Surface Mount Kit Suspended Mount Klt

PRODUCT DETAILS

ELECTRICAL

Power (Selectable)	20 W-25 W-30 W-35 W
Voltage	120-277 V
Current	0.39 A
Power Factor	≥0.90
Total Harmonic Distortion (THD)	15%

LIGHTING PERFORMANCE

Lumens	2500 lm-3125 lm-3750 lm-4375 lm
Efficacy	125 lm/W
Color Temperature (CCT)	3000 K-3500 K-4000 K-5000 K
Color Rendering (CRI)	80+
R9 (Red Value)	3-10-3
R13 (Skin Tones)	
Beam Angle	120°
Light Distribution	Type VS
BUG Rating (Backlight, Uplight, and Glare)	B2 - U2 - G1
Dimmable Lighting Control	0-10 V, Range 10% - 100%



ENVIRONMENT

Operating Temperature	-4 °F ~ +113 °F
Suitable Location	DAMP
Ingress Protection Rating (IP)	IP40

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	5 (10 Years Warranty Option Available)

COMPONENTS

LED Light Source	Epistar	
Driver	Lifud	

CONSTRUCTION

Housing	Aluminum and High Quality LGP	
Diffuser		
Base / Power Supply	Hard Wired	
Finish	White	

PART NUMBER & QUALIFICATIONS

Ordering Part Number	IK-FP14-0035-DY-XX-J
Qualified Part Number	Not Qualified Yet
SKU Number	662187475516






Contrila CCT & Power Selectable Edge-Lit Panel Light 1' x 4'

Technical Data Shee



DIMENSIONS AND WEIGHT

Lenght	47.7"
Lengin	41.1
Height	0.39"
Width	12"
Net Weight (lbs)	
Chain Length	
Wire Length	
PACKAGING	
Box Dimensions (Inches)	
Box Weight (lbs)	
Quantity Per Box	1

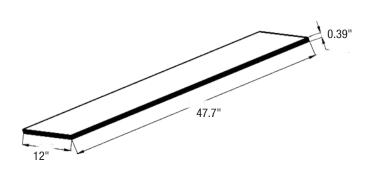

SUPPORTING DOCUMENTS

Product Sheet	View / Download
Installation Instructions	On Request
IES Files	On Request
LM79 Files	On Request
LM80 Files	On Request

ORDERING INFORMATION

ITEM	DESCRIPTION	CASE
662187475516	CONTRILA 1' x 4': 20 W-25 W-30 W-35 W / 3000 K-3500 K-4000 K-5000 K / 120-277 V / DIMMABLE / WHITE	1

ACCESSORIES

662187477046	REMOTE CONTROL	1
662187548043	SMART OCCUPANCY SENSOR WITH DAYLIGHT HARVESTING	1
662187548487	SMART OCCUPANCY SENSOR ON/OFF ONLY	1
662187528601	EMERGENCY PACK FOR LED FIXTURE 18 W/90 MIN/SPLIT TYPE/L DC	1
662187558875	EMERGENCY PACK FOR LED FIXTURE 10 W/90 MIN/SPLIT TYPE/L AC	1

MOUNTING OPTIONS

662187477640	SURFACE MOUNT KIT	1
662187476605	SUSPENDED MOUNT KIT	1