IKIO LED LIGHTING

ITEM SKU#: 662187488882

Delphi Architectural Troffer (1' x 4')

COMMERCIAL LIGHTING | TROFFERS

CCT & Power Selectable

FEATURES

- Comes with CCT and power selectable feature, allowing users to have better control.
- High luminance with soft and uniform light output, ensuring comfortable illumination.
- Suitable for a wide range of applications due to its low profile.
- Metal surfaces are painted pre-fabrication with high gloss baked matte powder paint for a long-lasting finish.

APPLICATIONS

Offices, Schools, Large Warehouses, Hospitals, Multipurpose Rooms, Hallways, Conference Rooms, Other Commercial Areas

MOUNTING OPTIONS

- Recessed Mount
- Surface Mount *(Kit Sold Separately)*

PRODUCT DETAILS

ELECTRICAL

Power (Selectable)	20 W-25 W-30 W
Voltage	120-277 V
Current	0.08 A-0.10 A-0.12 A
Power Factor	0.9
Total Harmonic Distortion (THD)	10%
Surge Protection	2 kV

LIGHTING PERFORMANCE

Lumens	2760 lm-3200 lm-3900 lm
Efficacy	128 lm/W
Color Temperature (Selectable)	3500 K-4000 K-5000 K
Color Rendering (CRI)	82
R9 (Red Value)	8
R13 (Skin Tones)	84-85-83
Beam Angle	120°
BUG Rating (Backlight, Uplight, and Glare)	B2-U1-G1
Dimmable Lighting Control	Continuous Dimming to 10% or Below

*The value R13 are calculated at 30 W.

ENVIRONMENT

Operating Temperature	-4 ºF ~ +122 ºF
Suitable Location	**DAMP**
Ingress Protection Rating (IP)	IP20

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	**5** (Extendable Up to 10 Years)

COMPONENTS

LED Light Source	SEOUL 3528
Driver	Simon

CONSTRUCTION

Housing	Galvanized Steel Plate
Cover Material / Lens	Polycarbonate (PMMA)
Diffuser	Frosted
Base / Power Supply	Hard Wired / Isolated Driver
Finish	White

PART NUMBER & QUALIFICATIONS

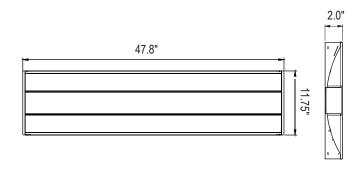|	
Ordering Part Number	IK-AT14F-202530-CCT-D
Qualified Part Number	IK-AT14F-202530-CCT-D (MS,EM,Blank,Both)
SKU Number	662187488882

DLC LISTED PREMIUM   c(UL)us LISTED   RoHS

Not all product variations listed on this page are DLC qualified. Visit https://www.designlights.org/qpl to confirm qualification.

info@ikioledlighting.com | +1 844-533-4546 | www.ikioledlighting.com

© 2023 IKIO LED LIGHTING. All Rights Reserved. Products and technologies in this document may be covered by one or more Patents Pending.

The product images shown are for illustration purposes only and may not be an exact representation of the product. Specifications subject to change without notice.

Page | 1

Delphi Architectural Troffer (1' x 4')

DIMENSIONS AND WEIGHT

Length (Inches)	47.8"
Width (Inches)	11.75"
Height (Inches)	2.0"
Net Weight (lbs)	7.71

PACKAGING

Box Dimensions (Inches)	48.4" x 12.08" x 4.44"
Box Weight (lbs)	17.7
Quantity Per Box	2

47.8"

11.75"

2.0"

SUPPORTING DOCUMENTS

DOCUMENTS	DOCUMENT LINK
Product Sheet	View / Download
IES Files	View / Download
LM79 Report	View / Download
LM80 Report	View / Download
Installation Instructions	View / Download

ORDERING INFORMATION

SKU NUMBER	DESCRIPTION	QUANTITY/BOX
662187488882	**DELPHI AT 1' x 4':** 20-25-30 W / 2760-3200-3900 LM / 35-40-50 K / 120-277 V / WHITE	2

ACCESSORIES

SOLD SEPARATELY

SKU NUMBER	PRODUCT CODE	DESCRIPTION	DOCUMENT LINK
662187482651	IK-ACC-R-RC100	**RC100 REMOTE**	View / Download
662187479033	IK-EMH-18170-HY	**EMERGENCY PACK FOR LED FIXTURE 18W/90 MIN/SPLIT TYPE/L**	View / Download
662187482682	IK-ACC-S-ANT9	**BI LEVEL DAYLIGHT HARVESTING MICROWAVE MOTION SENSOR**	View / Download
662187487137	IK-ACC-AT-SMKT-14	**SURFACE MOUNT KIT 1x4**	View / Download
662187481821	IK-ACC-14-FLMK	**FLANGE/DRYWALL MOUNT KIT**	View / Download