

ITEM SKU#: 662187477312

Delphi Architectural Troffer (2' x 4')

COMMERCIAL LIGHTING | TROFFERS



FEATURES

- Comes with CCT and power selectable feature, allowing users to have better control.
- High luminance with soft and uniform light output, ensuring comfortable illumination.
- Suitable for a wide range of applications due to its low profile
- Metal surfaces are painted pre-fabrication with high gloss baked matte powder paint for a long-lasting finish.

APPLICATIONS

Offices, Schools, Large Warehouses, Hospitals, Multipurpose Rooms, Hallways, Conference Rooms, Other Commercial Areas

MOUNTING OPTIONS

- Recessed Mount
- Surface Mount *(Kit Sold Separately)*

PRODUCT DETAILS

ELECTRICAL

Power (Selectable)	25 W-30 W-35 W
Voltage	120-277 V
Current	0.14 A
Power Factor	0.9
Total Harmonic Distortion (THD)	10%
Surge Protection	2 kV

LIGHTING PERFORMANCE

Lumens	3350 lm-3840 lm-4500 lm
Efficacy	128 lm/W
Color Temperature (Selectable)	3500 K-4000 K-5000 K
Color Rendering (CRI)	82
R9 (Red Value)	4
R13 (Skin Tones)	83
Beam Angle	114.4°
Light Distribution	Type VS
BUG Rating (Backlight, Uplight, and Glare)	B2-U1-G1
Dimmable Lighting Control	Continuous Dimming to 10% or Below

ENVIRONMENT

Operating Temperature	-4 °F ~ +122 °F
Suitable Location	DAMP
Ingress Protection Rating (IP)	IP20

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	5 <i>(Extendable Up to 10 Years)</i>

COMPONENTS

LED Light Source	SEOUL 3528
Driver	Simon

CONSTRUCTION

Housing	Galvanized steel plate
Cover Material / Lens	Polycarbonate (PMMA)
Diffuser	Frosted
Base / Power Supply	Hard Wired / Isolated Driver
Finish	White

PART NUMBER & QUALIFICATIONS

Ordering Part Number	IK-AT24F-253035-CCT-D
Qualified Part Number	IK-AT24F-253035-CCT-D
SKU Number	662187477312




Not all product variations listed on this page are DLC qualified. Visit <https://www.designlights.org/qpl> to confirm qualification.

DIMENSIONS AND WEIGHT

Length (Inches)	47.8"
Width (Inches)	23.75"
Height (Inches)	2.13"
Net Weight (lbs)	11.46

PACKAGING

Box Dimensions (Inches)	48.18" x 24.01" x 4.64"
Box Weight (lbs)	26.23
Quantity Per Box	2

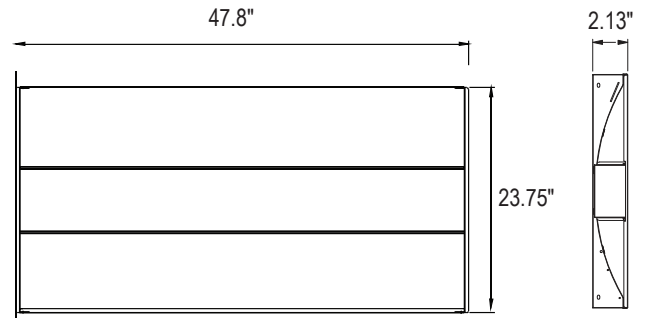

SUPPORTING DOCUMENTS

DOCUMENTS	DOCUMENT LINK
Product Sheet	View / Download
IES Files	View / Download
LM79 Report	View / Download
LM80 Report	View / Download
Installation Instructions	View / Download

ORDERING INFORMATION

SKU NUMBER	DESCRIPTION	QUANTITY/BOX
662187477312	DELPHI AT 2' x 4': 25-30-35 W / 3350-3840-4500 LM / 35-40-50 K / 120-277 V / WHITE	2

ACCESSORIES

SOLD SEPARATELY

SKU NUMBER	PRODUCT CODE	DESCRIPTION	DOCUMENT LINK
662187482651	IK-ACC-R-RC100	RC100 REMOTE	View / Download
662187479033	IK-EMH-18170-HY	EMERGENCY PACK FOR LED FIXTURE 18W/90 MIN/SPLIT TYPE/L DC	View / Download
662187482682	IK-ACC-S-ANT9	BI LEVEL DAYLIGHT HARVESTING MICROWAVE MOTION SENSOR	View / Download
662187477084	IK-ACC-AT-SMKT-24	SURFACE MOUNT KIT 2x4	View / Download
662187481838	IK-ACC-24-FLMK	FLANGE/DRYWALL MOUNT KIT	View / Download