




ITEM SKU#: 662187484259

# Delphi Retrofit Troffers (1' x 4')

COMMERCIAL LIGHTING | TROFFERS

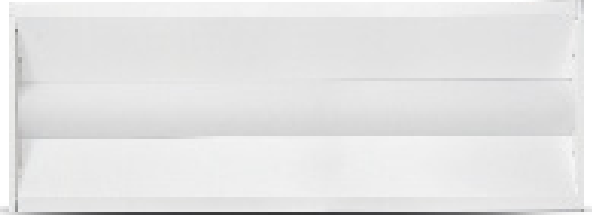

## FEATURES

- CCT and power selectable capabilities for greater light control.
- Suitable for damp locations.
- Greater energy savings over traditional fluorescent fixtures.
- High-gloss finish for metal surfaces.
- Baked with powder paint for durability and better aesthetics.
- Soft, smooth, and uniform light output.
- Can be used with existing fixtures for retrofit applications.

## APPLICATIONS AREAS

Offices, Hallways, Multipurpose Rooms, Conference Rooms

## MOUNTING OPTIONS

- Surface Mounted. (Kit Sold Separately)

## PRODUCT DETAILS

### ELECTRICAL

Power (Selectable)	20 W-25 W-30 W
Voltage	120-277 V
Current	0.08 A-0.09 A-0.11 A
Power Factor	0.959
Total Harmonic Distortion (THD)	8.5%
Surge Protection	2.0 kV

### LIGHTING PERFORMANCE

Lumens	2660 lm-3175 lm-3870 lm
Efficacy	127 lm/W
Color Temperature (Selectable)	3500 K-4000 K- 5000 K
Color Rendering (CRI)	81
R9 (Red Value)	3
R13 (Skin Tones)	83
Beam Angle	110°
Dimmable Lighting Control	Continuous Dimming to 10% or Below

\*Lumen output are calculated at 5000 K

### ENVIRONMENT

Operating Temperature	-4 °F ~ +122 °F
Suitable Location	<b>DAMP</b>
Ingress Protection Rating (IP)	IP20

### LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	<b>5</b>

### COMPONENTS

LED Light Source	SEOUL 3528
Driver	Simon

### CONSTRUCTION

Housing	Steel Sheet
Cover Material / Lens	PMMA
Diffuser	Frosted
Base / Power Supply	Hard Wire
Finish	White

### PART NUMBER & QUALIFICATIONS

Ordering Part Number	IK-RT14F-202530-CCT-D
Qualified Part Number	IK-RT14F-202530-CCT-D-es
SKU Number	662187484259




Not all product variations listed on this page are DLC qualified. Visit <https://www.designlights.org/qpl> to confirm qualification.

## DIMENSIONS AND WEIGHT

Length (Inches)	47.8"
Width (Inches)	11.9"
Height (Inches)	3.1"
Net Weight (lbs)	8.05

## PACKAGING

Box Dimensions (Inches)	49.76" x 12.72" x 4.80"
Box Weight (lbs)	14.71
Quantity Per Box	2

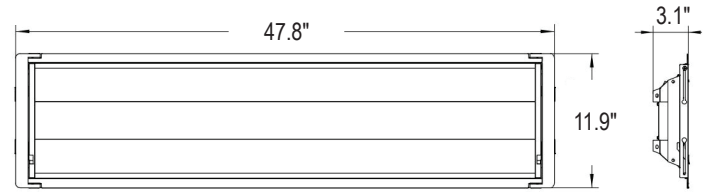

## SUPPORTING DOCUMENTS

DOCUMENTS	DOCUMENT LINK
<a href="#">Product Sheet</a>	<a href="#">View / Download</a>
<a href="#">IES Files</a>	<a href="#">View / Download</a>
<a href="#">LM79 Report</a>	<a href="#">View / Download</a>
<a href="#">LM80 Report</a>	<a href="#">View / Download</a>
<a href="#">Installation Instructions</a>	<a href="#">View / Download</a>

## ORDERING INFORMATION

SKU NUMBER	PRODUCT CODE	DESCRIPTION	QUANTITY/BOX
662187484259	IK-RT14F-202530-CCT-D	DELPHI RT 1' x 4' : 20-25-30 W / 2660-3175-3870 LM / 35-40-50 K / 120-277 V / WHITE ONLY FIXTURE / WITHOUT ACCESSORIES	2
662187485775	IK-RT14F-202530-CCT-D-e	DELPHI RT 1' x 4' : 20-25-30 W / 2660-3175-3870 LM / 35-40-50 K / 120-277 V / WHITE WITH EMERGENCY DRIVER	2
662187485812	IK-RT14F-202530-CCT-D-s	DELPHI RT 1' x 4' : 20-25-30 W / 2660-3175-3870 LM / 35-40-50 K / 120-277 V / WHITE WITH LOW VOLTAGE MICROWAVE BI-LEVEL SENSOR	2
662187485744	IK-RT14F-202530-CCT-D-es	DELPHI RT 1' x 4' : 20-25-30 W / 2660-3175-3870 LM / 35-40-50 K / 120-277 V / WHITE WITH EMERGENCY DRIVER & LOW VOLTAGE MICROWAVE BI-LEVEL SENSOR	2

## ACCESSORIES

### SOLD SEPARATELY

SKU NUMBER	PRODUCT CODE	DESCRIPTION	DOCUMENT LINK
662187558257	IK-FP14-SMT KIT	SURFACE MOUNT KIT	<a href="#">View / Download</a>
662187485843	IK-ACC-S-ANT9C	LOW VOLTAGE MICROWAVE BI-LEVEL SENSOR	<a href="#">View / Download</a>
662187481821	IK-ACC-14-FLMK	FLANGE/DRYWALL MOUNT KIT	<a href="#">View / Download</a>
662187485867	IK-ACC-R-RC106	SENSOR REMOTE	<a href="#">View / Download</a>
662187479033	IK-EMH-18170-HY	EMERGENCY PACK FOR LED FIXTURE 18W/90 MIN/SPLIT TYPE/L	<a href="#">View / Download</a>