

ITEM SKU#: 662187529332

Delphi Retrofit Troffers (2' x 4')

COMMERCIAL LIGHTING | TROFFERS



FEATURES

- CCT & power selectable capabilities.
- Suitable for damp locations.
- Greater energy savings over traditional fluorescent fixtures.
- High-gloss finish for metal surfaces.
- Baked with powder paint for durability and better aesthetics.
- Soft, smooth and uniform light output.
- Can be used with existing fixtures for retrofit application.

APPLICATIONS

Offices, Hallways, Multipurpose Rooms, And Conference Rooms.

MOUNTING OPTIONS

- Recessed. *(Kit Sold Separately)*
- Surface Mounted *(Kit Sold Separately)*

PRODUCT DETAILS

ELECTRICAL

Power (Selectable)	25 W-30 W-34 W
Voltage	120-277 V
Current	0.10 A-0.12 A-0.14 A
Power Factor	0.9
Total Harmonic Distortion (THD)	10%
Surge Protection	2.5 kV

LIGHTING PERFORMANCE

Lumens	3125 lm-3750 lm-4250 lm
Efficacy	125 lm/W
Color Temperature (Selectable)	3500 K-4000 K- 5000 K
Color Rendering (CRI)	82
R9 (Red Value)	7.3
R13 (Skin Tones)	82.3
Beam Angle	AVE 110 x 110
Light Distribution	Type VS
BUG Rating (Backlight, Uplight, and Glare)	B2-U1-G1
Dimmable Lighting Control	Continuous Dimming to 10% or Below

ENVIRONMENT

Operating Temperature	-4 °F ~ +122 °F
Suitable Location	DAMP
Ingress Protection Rating (IP)	IP20

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	5 <i>(Extendable up to 10 years)</i>

COMPONENTS

LED Light Source	SEOUL 3528
Driver	Simon

CONSTRUCTION

Housing	Galvanized sheet
Cover Material / Lens	PMMA
Diffuser	Frosted
Base / Power Supply	Hard Wire
Finish	White

PART NUMBER & QUALIFICATIONS

Ordering Part Number	IK-RT24E-253034-CCT-D
Qualified Part Number	Not Qualified Yet
SKU Number	662187529332




DIMENSIONS AND WEIGHT

Length (Inches)	47.8"
Width (Inches)	23.8"
Height (Inches)	3.1"
Net Weight (lbs)	9.47

PACKAGING

Box Dimensions (Inches)	48.46" x 24.68" x 2.91"
Box Weight (lbs)	21.49
Quantity Per Box	2

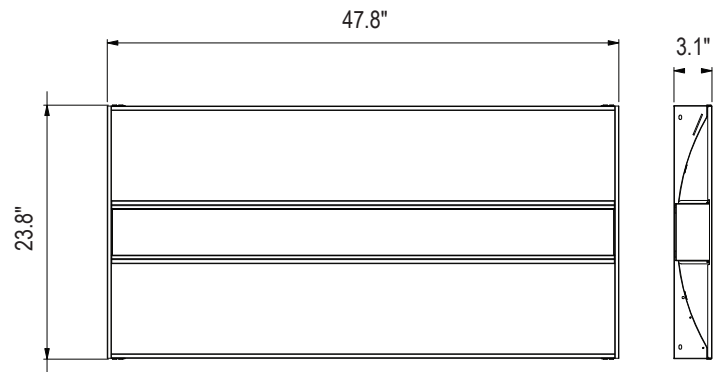

SUPPORTING DOCUMENTS

DOCUMENTS	DOCUMENT LINK
Product Sheet	View / Download
IES Files	View / Download
LM79 Report	View / Download
LM80 Report	View / Download
Installation Instructions	View / Download

ORDERING INFORMATION

SKU NUMBER	DESCRIPTION	QUANTITY/BOX
662187529332	DELPHI RT 2' x 4' : 25-30-34 W / 3125-3750-4250 LM / 35-40-50 K / 120-277 V / WHITE	2

ACCESSORIES

SOLD SEPARATELY

SKU NUMBER	PRODUCT CODE	DESCRIPTION	DOCUMENT LINK
662187482651	IK-ACC-R-RC100	RC100 REMOTE	View / Download
662187528601	IK-EMH-18170-FY	EMERGENCY PACK FOR LED FIXTURE 18W/90 MIN/SPLIT TYPE/L DC	View / Download
662187482668	IK-ACC-S-IFS06R	INTEGRATED LOW VOLTAGE DAYLIGHT HARVESTING/BI-LEVEL PIR MOTION SENSOR	View / Download
662187482675	IK-ACC-S-IFS08	INTEGRATED LOW VOLTAGE PC ON/OFF BI-LEVEL MICROWAVE MOTION SENSOR	View / Download
662187482682	IK-ACC-S-ANT9	BI LEVEL DAYLIGHT HARVESTING MICROWAVE MOTION SENSOR	View / Download
662187482699	IK-ACC-S-ANT4A	PIR OCCUPANCY BI LEVEL & DAYLIGHT HARVESTING SENSOR SENSOR	View / Download
662187482712	IK-ACC-RT-RMKT-24	RECESSED MOUNT KIT 2x4	View / Download