

ITEM SKU#: 662187533872

T8 Tube Type C

COMMERCIAL LIGHTING | LED TUBES

FEATURES

- Simple and uniform design makes it easier to install and replace existing fixtures, reducing the costs considerably.
- Outfitted with a high-quality external driver, delivering soft and comfortable lighting; no infrared or UV rays.
- Comes with a dimming option (0-10 V) for enhanced lighting control.
- Suitable for use in dry and damp locations and in low temperatures.

APPLICATIONS

Offices, Schools, Hospitals, Retail Stores, Lobbies, General Areas, Residential Spaces

PRODUCT DETAILS

ELECTRICAL

Power	15 W
Voltage	100-277 V
Current	0.06 A
Power Factor	0.9
Total Harmonic Distortion (THD)	20%

LIGHTING PERFORMANCE

Lumens	1965 lm
Efficacy	131 lm/W
Color Temperature (CCT)	4000 K
Color Rendering (CRI)	83
R9 (Red Value)	5
R13 (Skin Tones)	83
Beam Angle	160°
Dimmable Lighting Control	Continuous Dimming to 10% or Below



ENVIRONMENT

Operating Temperature	-4 °F ~ +122 °F
Suitable Location	DAMP

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	5

COMPONENTS

LED Light Source	Runlite - P28351-W29SE0E1FB1B3-LX01 AND LX05
Driver	ZY-DR-WG11-1

CONSTRUCTION

Housing	Aluminum & Plastic
Cover Material	Polycarbonate
Diffuser	Frosted
Base	G13
Finish	White

PART NUMBER & QUALIFICATIONS


Ordering Part Number	IK-T804-EX0015-DN-40C-J (Frosted)
Qualified Part Number	IK-T804-EX0015-DN-40C-J
SKU Number	662187533872



Not all product variations listed on this page are DLC qualified. Visit <https://www.designlights.org/qpl> to confirm qualification.

DIMENSIONS AND WEIGHT

Length (Inches)	48"
Diameter (Inches)	1"
Net Weight (lbs)	0.55

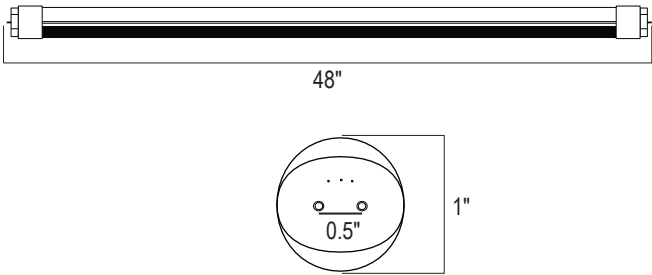

PACKAGING

Box Dimensions (Inches)	49.60" x 8.66" x 9.84"
Box Weight (lbs)	17.19
Quantity Per Box	30

SUPPORTING DOCUMENTS

DOCUMENTS	DOCUMENT LINK
Product Sheet	View / Download
IES Files	View / Download
LM79 Report	View / Download
LM80 Report	View / Download
Installation Instructions	View / Download

ORDERING INFORMATION

SKU NUMBER	DESCRIPTION	QUANTITY/BOX
662187533872	T8 TUBE TYPE C: 4FT / 15 W / 1965 LM / 4000 K / 100-277 V / WHITE	30