



ITEM SKU#: 662187553276

# T8 U-Bend Tube Type A&B

COMMERCIAL LIGHTING | T8 U-BEND TUBE LIGHTS

## FEATURES

- Compact and sleek U-bend shape.
- Can be rewired in a few simple steps to run on line voltage.
- Can also be used with existing instant start ballasts.
- Uniform and smooth light without any flickering, and excellent efficacy.
- Dual Mode Internal Driver (UL Type A&B).

## APPLICATIONS

Commercial Spaces, Residential Area and Office Area.

## PRODUCT DETAILS

### ELECTRICAL

Power	15 W
Voltage	100-277 V
Current	0.17 A
Power Factor	0.9
Total Harmonic Distortion (THD)	20%

### LIGHTING PERFORMANCE

Lumens	1950 lm
Efficacy	130 lm/W
Color Temperature (CCT)	4000 K
Color Rendering (CRI)	83
R9 (Red Value)	N/A
R13 (Skin Tones)	N/A
Beam Angle	180°
Light Distribution	--
BUG Rating ( Backlight, Uplight, and Glare )	--
Dimmable Lighting Control	Non Dimmable

### ENVIRONMENT

Operating Temperature	-22 °F ~ +149 °F
Suitable Location	--
Suitable Fixture Type	--
Ingress Protection Rating (IP)	IP20
Suitable for Emergency Fixtures/Ballasts	No

### LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	<b>5</b> (10 Years Warranty Option Available)

### COMPONENTS

LED Light Source	--
Driver	--

### CONSTRUCTION

Housing	Aluminum and Polycarbonate
Diffuser	Frosted
Base / Power Supply	G13 / Hard Wired
Finish	White


### QUALIFICATIONS

Model Number	Not Qualified Yet
SKU Number	662187553276



### DIMENSIONS AND WEIGHT

Length	11.92"
Width	5.9"
Thickness	0.80"
Net Weight (lbs)	--

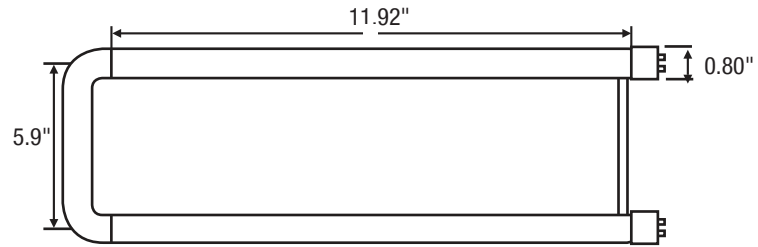

### PACKAGING

Box Dimensions (Inches)	--
Box Weight (lbs)	--
Quantity Per Box	--

### SUPPORTING DOCUMENTS

<a href="#">Product Sheet</a>	<a href="#">View / Download</a>
<a href="#">Installation Instructions</a>	<a href="#">View / Download</a>
<a href="#">IES Files</a>	<a href="#">View / Download</a>
<a href="#">LM79 Files</a>	<a href="#">View / Download</a>
<a href="#">LM80 Files</a>	<a href="#">On Request</a>
<a href="#">Ballast Compatibility</a>	<a href="#">On Request</a>

### ORDERING INFORMATION

ITEM	DESCRIPTION	CASE
662187553276	T8 U-BEND TUBE TYPE A&B: 2 FT / 15 W / 4000 K / 100-277 V / NON DIMMABLE / WHITE	1

### ADDITIONAL INFORMATION:

Family Item(s): • 662187465432 / 4000 K (CR) • 662187465449 / 5000 K (CR) • 662187493473 / 5000 K (FR)

- In direct wire application; shunted sockets use double ended wiring only and non-shunted can use either single or double ended wiring. Please refer to installation instructions for further details.
- IKIO Direct-Wire (UL Type A&B) Lamps are designed for use with IKIO LED-Ready fixtures (follow lamp wiring instructions). When using any alternate-brand fixture, please review the specific IKIO lamp installation guide wiring requirements first, to make sure the fixture is compatible before lamp installation.