



ITEM SKU#: 662187479583

# Delphi

## Fuel Pump Canopy Light

INDUSTRIAL LIGHTING | CANOPY LIGHTS



### FEATURES

- Low-profile, stylish design with durable powder coat finish.
- CCT & power selectable option ensures flexibility for varied applications.
- Suitable for ambient operating temperature.
- Meets the FCC Part 15, Part B, Class A standards for conducted and radiated emissions.
- Comes with dimming capability (0-10 V).
- Surge-protected and IP65 rated for wet locations.

### APPLICATIONS

Gas Stations, Commercial Spaces, Parking Lots, Other Industrial Spaces, Warehouses, and Hospitals.

### PRODUCT DETAILS

#### ELECTRICAL

|                                 |                      |
|---------------------------------|----------------------|
| Power (Selectable)              | 30 W-40 W-50.8 W     |
| Voltage                         | 120-277 V            |
| Current                         | 0.11 A-0.15 A-0.19 A |
| Power Factor                    | 0.957                |
| Total Harmonic Distortion (THD) | 12.7%                |
| Surge Protection                | 4 kV                 |

#### LIGHTING PERFORMANCE

|  |                              |
|--|------------------------------|
| Lumens                                       | 3900 lm-4978.4 lm-6320 lm    |
| Efficacy                                     | 124.46 lm/W                  |
| Color Temperature (Selectable)               | 3000 K-4000 K-5000 K         |
| Color Rendering (CRI)                        | 74                           |
| R9 (Red Value)                               | -19                          |
| R13 (Skin Tones)                             | 73-72-73                     |
| Beam Angle                                   | 155.6°                       |
| Light Distribution                           | Type I, Very Short           |
| BUG Rating ( Backlight, Uplight, and Glare ) | B2-U3-G2                     |
| Dimmable Lighting Control                    | Continuous Dimming Above 10% |

#### ENVIRONMENT

|                                |                  |
|--------------------------------|------------------|
| Operating Temperature          | -40 °F ~ +122 °F |
| Suitable Location              | <b>WET</b>       |
| Ingress Protection Rating (IP) | IP65             |

#### LIFESPAN

|                      |          |
|----------------------|----------|
| Average Life (Hours) | 50,000   |
| Warranty (Years)     | <b>5</b> |

#### COMPONENTS

|                  |               |
|------------------|---------------|
| LED Light Source | Lumileds 2835 |
| Driver           | Becky         |

#### CONSTRUCTION

|                       |          |
|-----------------------|----------|
| Housing               | Aluminum |
| Cover Material / Lens | PC       |
| Finish                | Bronze   |

#### PART NUMBER & QUALIFICATIONS

|                       |   |
|-----------------------|---|
| Ordering Part Number  | IK-CPSL-0050W-CS-[S;Blank]-[BR;WH;BK;Blank] |
| Qualified Part Number | IK-CPSL-0050W-CS-[S;Blank]-[BR;WH;BK;Blank] |
| SKU Number            | 662187479583                                |




DesignLights Consortium® (DLC) qualified product (Premium). Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.

**DIMENSIONS AND WEIGHT**

|                         |       |
|-------------------------|-------|
| <b>Length</b> (Inches)  | 9.56" |
| <b>Width</b> (Inches)   | 9.56" |
| <b>Height</b> (Inches)  | 3.46" |
| <b>Net Weight</b> (lbs) | 1.43  |

**PACKAGING**

|                                |                        |
|--------------------------------|------------------------|
| <b>Box Dimensions</b> (Inches) | 10.23" x 9.84" x 3.74" |
| <b>Box Weight</b> (lbs)        | 2.2                    |
| <b>Quantity Per Box</b>        | 1                      |

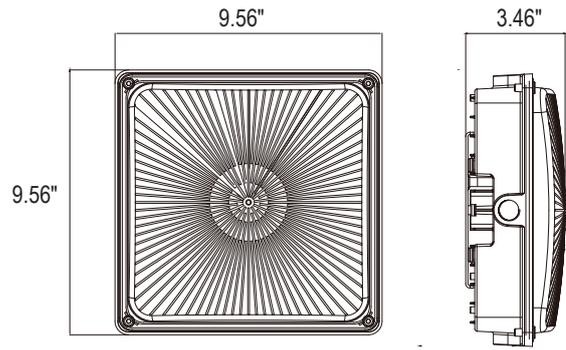

**SUPPORTING DOCUMENTS**

| DOCUMENTS                                 | DOCUMENT LINK                   |
|---|---------------------------------|
| <a href="#">Product Sheet</a>             | <a href="#">View / Download</a> |
| <a href="#">IES Files</a>                 | <a href="#">View / Download</a> |
| <a href="#">LM79 Report</a>               | <a href="#">View / Download</a> |
| <a href="#">LM80 Report</a>               | <a href="#">View / Download</a> |
| <a href="#">Installation Instructions</a> | <a href="#">View / Download</a> |

**ORDERING INFORMATION**

| SKU NUMBER   | DESCRIPTION  | QUANTITY/BOX |
|--------------|--|--------------|
| 662187479583 | DELPHI FPCL : 30-40-50.8 W / 3900-4978.4-6320 LM / 30-40-50 K / 120-277 V / BRONZE / DLC | 1            |