

ITEM SKU#: 662187548005

Ortega Fuel Pump Canopy Light

INDUSTRIAL LIGHTING | CANOPY LIGHTS



- High savings in energy consumption and maintenance cost.
- Rugged body which protects the luminaire against moisture & vibration.
- Effective resistance towards common surges.
- Reliable performance even in humid environments.

APPLICATIONS

Commercial Spaces, Parking Lots, Gas Stations, Other Industrial Spaces

PRODUCT DETAILS

Dimmable Lighting Control

ELECTRICAL

Power

Voltage	100-277 V	
Current	0.83 A	
Power Factor	≥0.90	
Total Harmonic Distortion (THD)		
LIGHTING PERFORMANCE		
Lumens	9750 lm	
Efficacy	130 lm/W	
Color Temperature (CCT)	5000 K	
Color Rendering (CRI)	80+	
R9 (Red Value)	N/A	
R13 (Skin Tones)	N/A	
Beam Angle	110°	
Light Distribution		
BUG Rating (Backlight, Uplight, and Glare)		



ENVIRONMENT

Operating Temperature	-13 °F ~ +104 °F
Suitable Location	WET
Ingress Protection Rating (IP)	IP66

LIFESPAN

Average Life (Hours)	100,000	
Warranty (Years)	10	

COMPONENTS

LED Light Source	Lumiled 3030	
Driver	Meanwell HLG	

CONSTRUCTION

Housing	Aluminum and Polycarbonate	
Lens		
Base / Power Supply	Hard Wired	
Finish	White	
Effective Projected Area (EPA)		
Wind Shear Rating		

QUALIFICATIONS

Model Number	Not Qualified Yet
SKU Number	662187548005







Continuous Dimming to

10% or Below

75 W

Ortega Fuel Pump Canopy Light

Technical Data Shee




DIMENSIONS AND WEIGHT

Length	15.11"
Height	2.75"
Width	15.11"
Net Weight (lbs)	

PACKAGING

	monnana		
	Box Dimensions (Inches)	16" x 16" x 5"	
	Box Weight (lbs)	11	
_	Quantity Per Box	1	

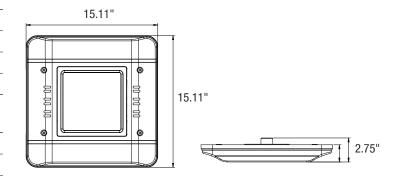

SUPPORTING DOCUMENTS

Product Sheet	View / Download
Installation Instructions	View / Download
IES Files	View / Download
LM79 Files	View / Download
LM80 Files	On Request

ORDERING INFORMATION

ITEM	DESCRIPTION	CASE
662187548005	ORTEGA FUEL PUMP: 75 W / 5000 K / 100-277 V / DIMMABLE / WHITE	1

ADDITIONAL INFORMATION:

- The mounting bracket is not included with the fixture, it is ordered as a separate item number.
- Product requires top-mounted shorting cap or optional twist-lock photocell installed to operate.