

ITEM SKU#: 662187547916

# Parko Parking Garage Canopy Light

INDUSTRIAL LIGHTING | CANOPY LIGHTS



## FEATURES

- Low profile fixture with a highly reliable LED light engine.
- Die-cast housing which protect LEDs and drivers.
- Suitable for both outdoor and indoor applications.
- Consistent performance even in humid environments.

## APPLICATIONS

Garages, Gas Stations, Parking Lots, Walkways

## PRODUCT DETAILS

### ELECTRICAL

Power	42.99 W
Voltage	100-277 V
Current	0.44 A
Power Factor	0.91
Total Harmonic Distortion (THD)	17.95%

### LIGHTING PERFORMANCE

Lumens	5580 lm
Efficacy	129.83 lm/W
Color Temperature (CCT)	5000 K
Color Rendering (CRI)	84.4
R9 (Red Value)	N/A
R13 (Skin Tones)	N/A
Beam Angle	120°
Light Distribution	--
BUG Rating ( Backlight, Uplight, and Glare )	--
Dimmable Lighting Control	Continuous Dimming to 10% or Below

### ENVIRONMENT

Operating Temperature	-13 °F ~ +104 °F
Suitable Location	<b>WET</b>
Ingress Protection Rating (IP)	IP66

### LIFESPAN

Average Life (Hours)	100,000
Warranty (Years)	<b>10</b>

### COMPONENTS

LED Light Source	Lumiled 3030
Driver	Meanwell HLG

### CONSTRUCTION

Housing	Aluminum and Polycarbonate
Lens	--
Base / Power Supply	Hard Wire / Surge Protector
Finish	White
Effective Projected Area (EPA)	--
Wind Shear Rating	--

### QUALIFICATIONS

Model Number	Not Qualified Yet
SKU Number	662187547916




## DIMENSIONS AND WEIGHT

Length	4.48"
Height	10.36"
Diameter	Ø11.14"
Net Weight (lbs)	--

## PACKAGING

Box Dimensions (Inches)	--
Box Weight (lbs)	--
Quantity Per Box	1

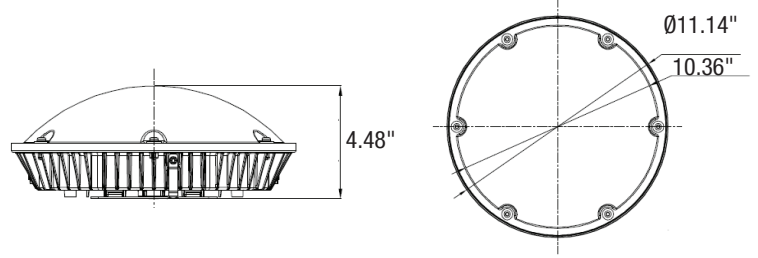

## SUPPORTING DOCUMENTS

<a href="#">Product Sheet</a>	<a href="#">View / Download</a>
<a href="#">Installation Instructions</a>	<a href="#">View / Download</a>
<a href="#">IES Files</a>	<a href="#">View / Download</a>
<a href="#">LM79 Files</a>	<a href="#">View / Download</a>
<a href="#">LM80 Files</a>	<a href="#">On Request</a>

## ORDERING INFORMATION

ITEM	DESCRIPTION	CASE
662187547916	PARKO GARAGE: 42.99 W / 5000 K / 100-277 V / DIMMABLE / WHITE	1