

ITEM SKU#: 662187560779

Parko Parking Garage Canopy Light

INDUSTRIAL LIGHTING | CANOPY LIGHTS



FEATURES

- Low profile fixture with a highly reliable LED light engine.
- Die-cast housing which protect LEDs and drivers.
- Suitable for both outdoor and indoor applications.
- Consistent performance even in humid environments.

APPLICATIONS

Garages, Gas Stations, Parking Lots, Walkways

PRODUCT DETAILS

ELECTRICAL

Power	61.06 W
Voltage	100-277 V
Current	0.67 A
Power Factor	0.92
Total Harmonic Distortion (THD)	14.27%

LIGHTING PERFORMANCE

Lumens	7954 lm
Efficacy	130.26 lm/W
Color Temperature (CCT)	5000 K
Color Rendering (CRI)	85
R9 (Red Value)	N/A
R13 (Skin Tones)	N/A
Beam Angle	120°
Light Distribution	--
BUG Rating (Backlight, Uplight, and Glare)	--
Dimmable Lighting Control	Continuous Dimming to 10% or Below

ENVIRONMENT

Operating Temperature	-13 °F ~ +104 °F
Suitable Location	WET
Ingress Protection Rating (IP)	IP66

LIFESPAN

Average Life (Hours)	100,000
Warranty (Years)	10

COMPONENTS

LED Light Source	Lumiled 3030
Driver	Meanwell HLG

CONSTRUCTION

Housing	Aluminum and Polycarbonate
Lens	--
Base / Power Supply	Hard Wire / Surge Protector
Finish	White
Effective Projected Area (EPA)	--
Wind Shear Rating	--


QUALIFICATIONS

Model Number	Not Qualified Yet
SKU Number	662187560779



DIMENSIONS AND WEIGHT

Length	4.48"
Height	10.36"
Diameter	Ø11.14"
Net Weight (lbs)	--

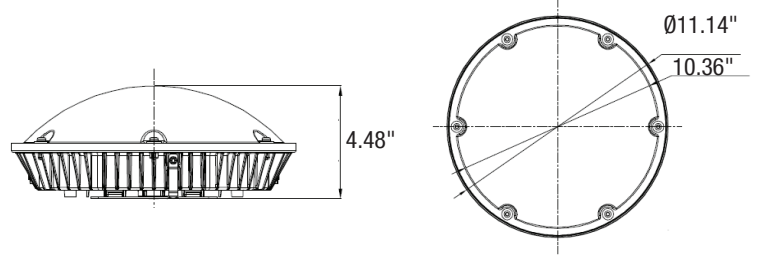

PACKAGING

Box Dimensions (Inches)	--
Box Weight (lbs)	--
Quantity Per Box	1

SUPPORTING DOCUMENTS

Product Sheet	View / Download
Installation Instructions	View / Download
IES Files	View / Download
LM79 Files	View / Download
LM80 Files	On Request

ORDERING INFORMATION

ITEM	DESCRIPTION	CASE
662187560779	PARKO GARAGE: 60 W / 5000 K / 100-277 V / DIMMABLE / WHITE	1