

CPS Series

ITEM SKU#: 662187529332

Delphi Retrofit Troffers 2' x 4'

CPS SERIES | TROFFERS



FEATURES

- Incorporates CCT & Power selectable capabilities.
- Suitable for damp locations.
- Greater energy savings over traditional fluorescent fixtures.
- High-gloss finish for metal surfaces.
- Baked with powder paint for durability and better aesthetics.
- Soft, smooth and uniform light output.
- Can be used with existing fixtures for retrofit application.

APPLICATIONS

Offices, hallways, multipurpose rooms, and conference rooms.

MOUNTING OPTIONS

Surface Mount Kit

PRODUCT DETAILS

ELECTRICAL

Power (Selectable)	25 W-30 W-34 W
Voltage	120-277 V
Current	0.31 A
Power Factor	0.9
Total Harmonic Distortion (THD)	10%

LIGHTING PERFORMANCE

Lumens	3125 lm-3750 lm-4250 lm
Efficacy	125 lm/W
Color Temperature (CCT)	3500 K-4000 K-5000 K
Color Rendering (CRI)	82
R9 (Red Value)	N/A
R13 (Skin Tones)	N/A
Beam Angle	120°
Light Distribution	Type VS
BUG Rating (Backlight, Uplight, and Glare)	B2 - U0 - G1
Dimmable Lighting Control	Continuous Dimming to 10% or Below

ENVIRONMENT

Operating Temperature	-4 °F ~ +122 °F
Suitable Location	DAMP
Ingress Protection Rating (IP)	IP40

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	5 (+5 Years Extended Warranty Option Available)

COMPONENTS

LED Light Source	Seoul 3528
Driver	Simon Driver

CONSTRUCTION

Housing	Aluminum / Metal Sheet
Diffuser	Frosted
Base / Power Supply	Hard Wire
Finish	Silver

PART NUMBER & QUALIFICATIONS

Ordering Part Number	IK-RT24E-253034-CCT-D
Qualified Part Number	Not Qualified Yet
SKU Number	662187529332




DIMENSIONS AND WEIGHT

Length	47.8"
Height	2.4"
Width	23.9"
Net Weight (lbs)	13.5

PACKAGING

Box Dimensions (Inches)	49" x 25" x 2.92"
Box Weight (lbs)	3.6
Quantity Per Box	1

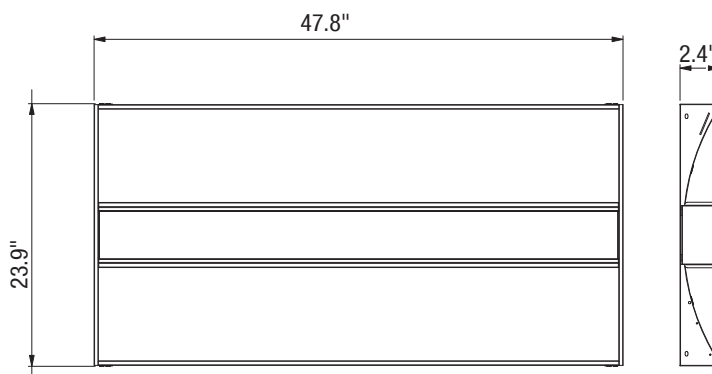

SUPPORTING DOCUMENTS

Product Sheet	View / Download
Installation Instructions	On Request
IES Files	View / Download
LM79 Files	On Request
LM80 Files	On Request

ORDERING INFORMATION

ITEM	DESCRIPTION	CASE
662187529332	DELPHI RETROFIT TROFFERS 2' x 4': 25 W-30 W-34 W / 3500 K-4000 K-5000 K / 120-277 V / DIMMABLE / SILVER	1

ACCESSORIES

662187558875	EMERGENCY PACK FOR LED FIXTURE 10 W/90 MIN/SPLIT TYPE/L AC	1
662187528601	EMERGENCY PACK FOR LED FIXTURE 18 W/90 MIN/SPLIT TYPE/L DC	1
662187548487	SMART OCCUPANCY SENSOR ON/OFF ONLY	1
662187548043	SMART OCCUPANCY SENSOR WITH DAYLIGHT HARVESTING	1
662187477046	REMOTE CONTROL	1

MOUNTING OPTIONS

662187477091	SURFACE MOUNT KIT	1
--------------	-------------------	---