

ITEM SKU#: 662187478715

Capella Stadium Flood Light Series 4 INDUSTRIAL LIGHTING | STADIUM FLOOD LIGHTS



FEATURES

- Superior aesthetics with a modern look.
- Excellent heat management system enabled by of multiple vents.
- Multi-faceted optic design to distribute light evenly and reduce glare.

APPLICATIONS

Resistant to electrical interference due to high quality chip. Arenas, gymnasiums, plazas, airports, courtyards and other public areas public areas.

MOUNTING OPTIONS

- Trunnion Mount Kit
- Knuckle Mount Slip Fitter Kit
- Stereo Base Installation
- · Lumosa Tiny

PRODUCT DETAILS

ELECTRICAL

Power	250 W
Voltage	100-277 V, 50/60 Hz
Current	
Power Factor	≥0.95
Total Harmonic Distortion (THD)	<15%
LIGHTING PERFORMANCE	
Lumens	32500 lm
Efficacy	130 lm/W
Color Temperature (CCT)	5000 K
Color Rendering (CRI)	70+
R9 (Red Value)	
R13 (Skin Tones)	
Beam Angle	30°
Light Distribution	NA
BUG Rating (Backlight, Uplight, and Glare)	NA
Dimmable Lighting Control	Non Dimmable

ENVIRONMENT

Operating Temperature	-22 °F ~ +122 °F
Suitable Location	WET
Ingress Protection Rating (IP)	IP66

LIFESPAN

Warranty (Years)	10
Average Life (Hours)	100,000

COMPONENTS

LED Light Source	Philips / Samsung
Driver	Meanwell

CONSTRUCTION

Housing (Heat Radiator)	Die-cast aluminum
Lens	PC
Diffuser	Clear
Base / Power Supply	Hard Wire
Finish	Black
Effective Projected Area (EPA)	
Wind Shear Rating	

PART NUMBERS & CERTIFICATES

Model Number	Not Qualified Yet
SKU Number	662187478715








DIMENSIONS AND WEIGHT

Length	11.65"
Height	5.29"
Width	19.0"
Net Weight (lbs)	

PACKAGING

IAUKAUKU	
Box Dimensions (Inches)	20.8" x 13.5" x 7.4"
Box Weight (lbs)	16.0
Quantity Per Box	1

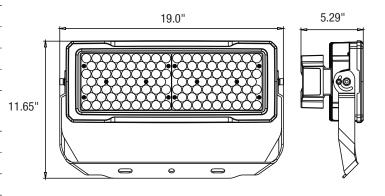

SUPPORTING DOCUMENTS

Product Sheet	View / Download
Installation Instructions	View / Download
IES Files	View / Download
LM79 Files	View / Download
LM80 Files	On Request

ORDERING INFORMATION

ITEM	DESCRIPTION	CASE
662187478715	CAPELLA STADIUM FLOOD LIGHTS SERIES 4: 250 W / 5000 K / 100-277 V / NON DIMMABLE / BLACK	1